

Permanent or Portable Installation


Flomatic towers can accommodate either permanent or portable installation requirements. Nutserts are built into the base of the tower chassis for permanent installations. The two-inch mounting bolts generally will fit through most surfaces. For portable installations, a sled base with a convenient two-piece assembly is standard to all Flomatic towers. Portable installations support seasonal products or meet those situations where it is not possible to place holes in a counter. An optional plastic drip pan is available for the 12P and the 34P when a plumbed drain line is not possible.



12P



34P

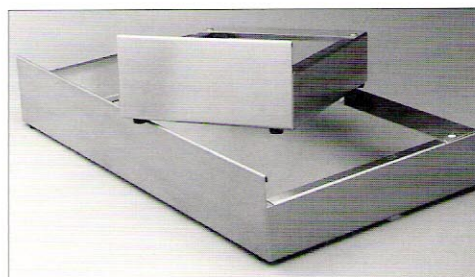

Sled Bases



56P

SPECIFICATIONS:

Part Identification:	12P-1 12P-2	34P-3 34P-4	56P-5 56P-6
Width:	6 1/2" (16.51cm)	12" (30.48cm)	17 1/2" (44.45cm)
Depth:	7 1/2" (19.05cm)	7 1/2" (19.05cm)	7 1/2" (19.05cm)
Height w/ sled base:	16 3/4" (42.54cm)	16 3/4" (42.54cm)	16 3/4" (42.54cm)
Height w/o sled base:	14 1/2" (36.83cm)	14 1/2" (36.83cm)	14 1/2" (36.83cm)
Cup Clearance:	9 1/2" (24.13cm)	9 1/2" (24.13cm)	9 1/2" (24.13cm)
Product Flavors:	1 or 2	3 or 4	5 or 6
Shipping Weight:	Apx. 12 lbs.(5.44kg)	Apx. 20 lbs.(9.07kg)	Apx. 29 lbs.(13.15kg)
Drain Pan:	Attached	Attached	Attached
Material:	304 SS	304 SS	304 SS
Transformer:	Remote mount 24V AC, 2.4 amp.	Remote mount 24V AC, 2.4 amp.	Remote mount 24V AC, 2.4 amp.

Valve Options (Specify for all towers):	424 w/ 372-Q/380-Q	202 Valves w/ 300-Q
Electric:	424-CF-E15-1521	202-QD-E10-1101
Self-service:	424-CF-S15-1525	N/A
Portion Control:	424-CF-P32-1500	N/A
Manual:	424-CF-1521	202-QD-1101



FLOMATIC

Flomatic International
5924 SE 47th Avenue
Portland, OR 97206

TEL: (503) 775-2550
FAX: (503) 771-0068

